

# WASHTECH®

PROFESSIONAL WASH SYSTEMS

## M2

### Professional Passthrough Dishwasher - 500mm Rack

**W 700mm x D 765mm x H 1525mm**

The M2 washes up to 1000 plates per hour and is ideal for most restaurants – the market leading unit for passthrough dishwashers.

#### Standard Features


- 2.4 litres per cycle hot water consumption
- Up to 1000 plates per hour
- Electronic controls with enhanced functionality
- Multi-cycle options – 1, 2 and 3 minute cycles with manual cycle mode, Ecopower, Soft Start and Self Cleaning cycle
- Service diagnostics for error recognition
- Double filtration via scrap trays and separate wash inlet filter
- Dual chemical injectors
- Drain pump
- Stainless steel upper and lower wash & rinse arms with removable cleaning caps
- Recirculates wash water at nominal 350 litres per minute
- 2.5kW wash & 3/6kW rinse heating (3 phase required for 6kW)
- 430mm door clearance
- Suits 500mm international standard racks
- Autostart on hood closure
- Anti-drip door edge channels water away from operator
- Easy clean L-shaped tank with curved corners
- Stainless steel construction
- Assured final rinse – 316 grade stainless steel rinse tank and rinse booster
- QuickConnect
  - Water supply hose
  - Dual chemical injector lines
  - Drain pump outlet hose
  - 15 amp plugset
- Corner or in-line installation
- Unique 595mm or 640mm bench gap installation option
- Includes adjustable 200mm high legs
- No commissioning required
- Watermark certified
- On site 3 phase conversion if required

#### Includes:

- 2 x 6007028 – 500mm dish rack
- 1 x 6007029 – 500mm cup rack
- 2 x C660503 – cutlery containers



The unit shall be a Washtech passthrough dishwasher with Watermark certification, suitable for in-line or corner installation. The unit shall have automatic fill and low level wash pump and element protection and start automatically on door closure. It shall be fitted with electronic controls and keypad with operator selectable 1, 2 and 3 minute complete operating cycles. Door clearance shall be 430mm. The unit shall be fitted with upper and lower all stainless steel wash arms and independent rinse arms, all with removable end plugs for cleaning. The unit shall be fitted with a 0.75kW wash pump and hot water consumption shall be 2.4 litres per operating cycle. The unit shall require 15amp single phase supply, and be suitable also for 15 amp 3 phase 5 wire supply if required. The unit shall be supplied with 500mm cup and dishracks and shipped in 100% recyclable packaging. Height of machine shown includes maximum 60mm adjustable leg extension.



### M2

## Professional Passthrough Dishwasher - 500mm Rack



Australia  
www.moffat.com.au

Australia  
Moffat Pty Limited


Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au  
www.moffat.com.au

New South Wales  
Telephone 02-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone 03-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone 07-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone 08-9202 6820  
bgarcia@moffat.com.au

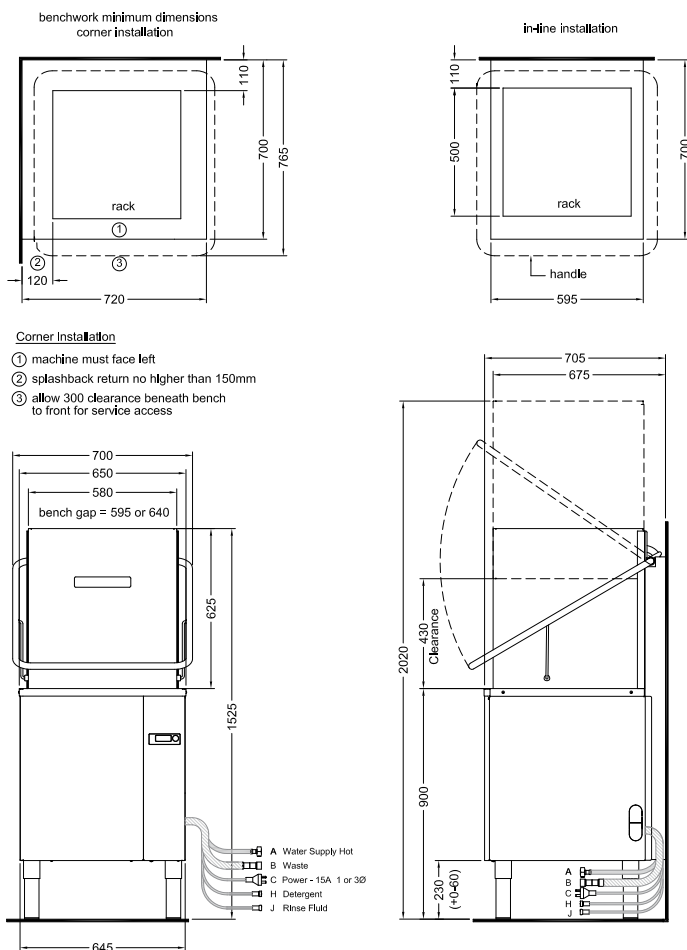

**A Hot Water**  
temperature 65°C  
connection 3/4"  
pressure 200-350kPa  
flow 20 litres per min  
quality potable & soft

**B Waste**  
connection 1.5 BSP  
hose supplied

**C Electrical**  
single phase 240V 50Hz 15 amp plugset supplied  
OR 3 phase 415V 50Hz 15 amp

**Dimensions**  
Width 700mm  
Depth 765mm  
Height 1525mm  
Weight 94kg

**Packed Dimensions**  
Width 760mm  
Depth 830mm  
Height 1450mm  
Weight 125kg  
Cubicmetres 0.91m<sup>3</sup>

Refer operator manual for complete  
installation instructions