

XU

Economy Undercounter Dishwasher - 500mm Rack

W 570mm x D 635mm x H 840mm

The new XU is a full height undercounter 500mm rack dishwasher with classic Washtech electromechanical controls for long term reliability.

Standard Features


- Low hot water consumption 2.6 litres per cycle
- Up to 600 plates per hour
- Quickstart two minute cycle
- Classic electromechanical controls
- Double filtration system
- Dual chemical injectors
- Drain pump
- Upper and lower wash & rinse arms with precision moulded jets
- Recirculates wash water at nominal 200 litres per minute
- 2.5kW wash and 3kW rinse heating
- 350mm door clearance
- Suits 500mm international racks
- Magnetic door safety switch
- Stainless steel construction
- QuickConnect
 - Water supply hose
 - Dual chemical injector lines
 - Drain pump outlet hose
 - 15 amp plugset
- No commissioning required
- Watermark certified

Includes:

- 1 x 6007028 - 500mm dish rack
- 1 x 6007029 - 500mm cup rack
- 1 x C660503 - cutlery container




The unit shall be a Washtech undercounter dishwasher with Watermark certification. The dishwasher shall have upper mounted controls with a two minute complete operating cycle. The unit shall be supplied with 500mm cup and dishracks and the wash compartment shall be 350mm tall. The unit shall be fitted with rotating upper and lower wash and rinse arms, detergent injector, rinse fluid injector, and drain pump. Hot water consumption shall be 2.6 litres per operating cycle and electrical supply requirement 15 amp single phase. The unit shall be supplied with 500mm all plastic cup and dishracks and shipped in 100% recyclable shipping packaging.



XU

Economy Undercounter Dishwasher - 500mm Rack

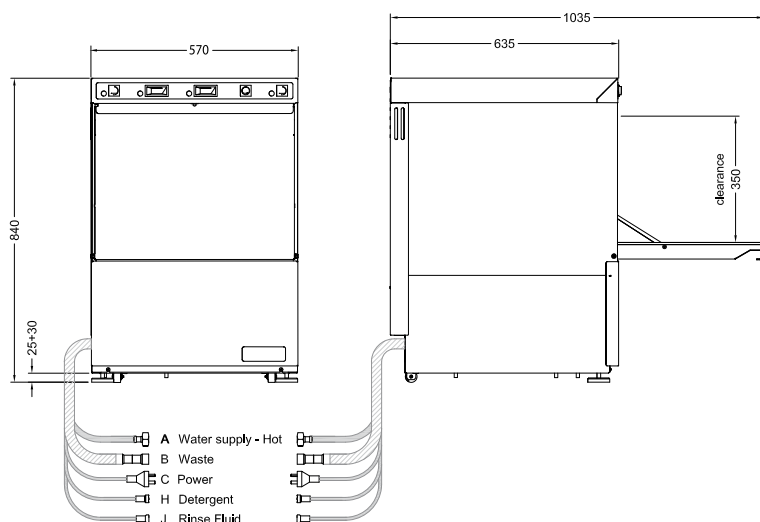

Australia
www.moffat.com.au

Australia
 Moffat Pty Limited

Victoria/Tasmania
 740 Springvale Road
 Mulgrave, Victoria 3170
 Telephone 03-9518 3888
 Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
 Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
 Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
 Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
 Telephone 08-9202 6820
bgarcia@moffat.com.au

A Hot Water		temperature	65°C
		connection	3/4
		pressure	200-350kPa
		flow	20 litres per min
		quality	potable & soft
B Waste		connection	1.5 BSP
		hose supplied	
C Electrical		Single phase 240V 50Hz	15 amp plugset supplied

Dimensions	
Width	570mm
Depth	635mm
Height	840mm
Weight	60kg

Packed Dimensions	
Width	720mm
Depth	690mm
Height	970mm
Weight	77kg
Cubicmetres	0.48m ³

Refer operator manual for complete installation instructions

