

XV

Economy Undercounter Dishwasher/Glasswasher – 450mm Rack W 535mm x D 595mm x H 840mm

The Washtech XV is the latest in a series of machines that has been refined since 1981. Bringing together reliable electromechanical controls, our latest digital wash and rinse temperatures displays, and a small footprint the XV is able to wash sixteen 230mm plates per cycle in 450mm plastic racks – only 2 less than larger machines using 500mm racks.

Washtech's XV is a compact, simple to use and easy to service undercounter dishwasher/glasswasher perfect for everything from Cafes and Bars to Kindergartens and Corporate Offices.

Standard Features

- Quikstart 60 and 120 second glass and dishwashing cycles
- Washes up 840 plates per hour / 960 glasses per hour
- Compatible with 365mm to 450mm glass and dish racks
- QuikConnect Installation with everything you need including:
 - Water supply hose
 - Dual detergent and rinse aid pumps with injector lines
 - Drain pump outlet hose
 - 15 amp plugset
 - No commissioning required
- Reliable results through upper and lower wash/rinse arms with precision moulded jets
- Easily serviced electromechanical design
- Durable stainless steel construction
- Low hot water consumption of 2.6 litres per cycle
- Moffat's Comprehensive 5-2-1 Warranty

Includes:


- 1x 600 70081 - 450mm dish rack
- 1x 600 70080 - 450mm cup rack
- 1x C660503 - cutlery container
- 1x 216 10031 - rack adapter



XV

Economy Undercounter Dishwasher/Glasswasher – 450mm Rack

W 535mm x D 595mm x H 840mm

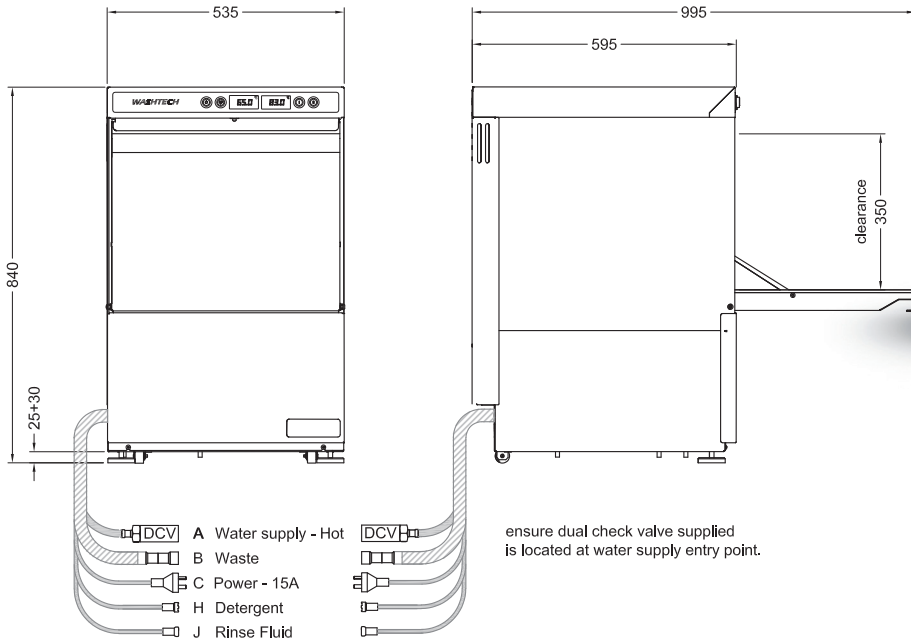

MOFFAT®

moffat.com.au

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

A Hot Water

Temperature	65°C
Connection	3/4" male hose supplied
Pressure	200-350kPa
Flow	20 litres per min
Quality	Potable & soft
Backflow Prevention	Dual Check Valve (DCV)
Consumption	2.6 litres per cycle

B Waste

Connection	Hose supplied for 38mm open standpipe 750 high or connection to sink trap
------------	---

C Electrical

Single phase	240V 50Hz 15A plugset supplied
--------------	--------------------------------

Maximum Power Consumption

Single phase	3.4kW
--------------	-------

Heating

Wash	2.5kW
Rinse	3.0kW

Dimensions

Width	535mm
Depth	595mm
Height	840mm
Weight	66kg

Packed Dimensions

Width	645mm
Depth	610mm
Height	970mm
Weight	83kg
Cubicmetres	0.38m ³

Water Quality Requirements

Hardness	ppm	pH
Min	20	7
Max	100	8

Ions	Cl ⁻	SO ₄	Fe	Mn	Cu	CL ₂
Max mg/l	100	400	0.1	0.5	0.05	0.1

Refer operator manual for installation instructions



ISO9001

All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
Moffat / 11.16

an Ali Group Company



The Spirit of Excellence